

Declaration of Performance (DoP) Wisa® Form

Reference number DoP: DOP_HBVS_59_EN_v1

Identification code of the product type

WISA®-Form Beto

Intended use

A coated special plywood for use in slab loose panel concrete formwork.

Certification

System of assessment and verification of the constancy of performance

Harmonised norm


Identification number of the notified body

Declared performances

Nominal thickness (mm)	Mean modules of elasticity bending (N/mm ²)		Characteristics strength bending (N/mm ²)	
	EmII	EmI-	fmII	fmI-
15	8259	6337	33.0	18.5
18	8767	5988	35.1	17.1
21	7621	6774	30.5	18.9






Face grain parallel to the span (||)

← grain direction of surface veneers



Face grain perpendicular to the span (I-)

← grain direction of surface veneers

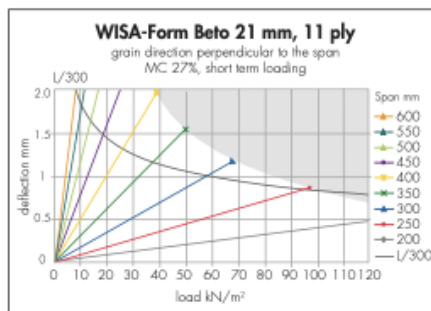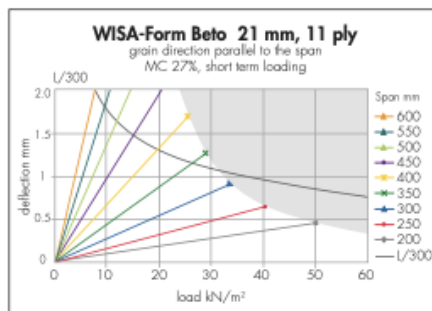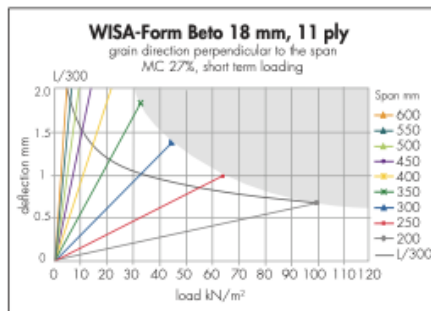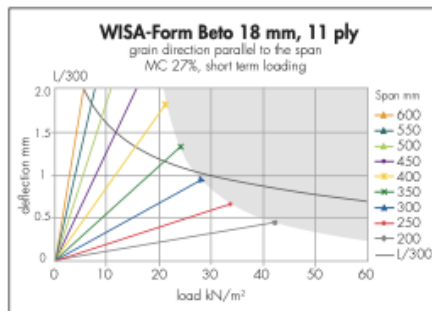

Moisture content 27%, short time loading.

Modification factor for duration of load and moisture content $k_{mod}=0.7$
Deformation factor $k_{def}=0.4$
Partial safety factor for load 1,2 Partial safety factor for material 1.3 Deflection
limit $L/300$ of the span
Support width is not taken into account in calculations.

The performance of the product identified here above is in conformity with the
declared performance.

The Declaration of Performance is issued in conformity with Legislation (EU) n°
305/2011 under the sole responsibility of the manufacturer identified here below.

Manufacturer

Hout - Bois van Steenberge nv
Steenweg Op Aalst, 27
9620 Zottegem
Belgium

Telephone : +32(9) 360.00.24
Fax : +32(9) 360.77.31

Email: info@vansteenberge.be
Website : www.vansteenberge.be

Signed by the manufacturer:



Zottegem, 15 March 2023

NOVERPO Comm. V
Represented by
Jean-Pierre Noël
General Manager
Hout-Bois van Steenberge